
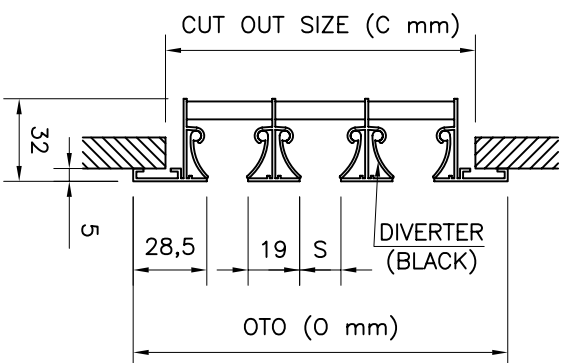


DO NOT SCALE THE DRAWING. IF IN DOUBT, PLEASE ASK

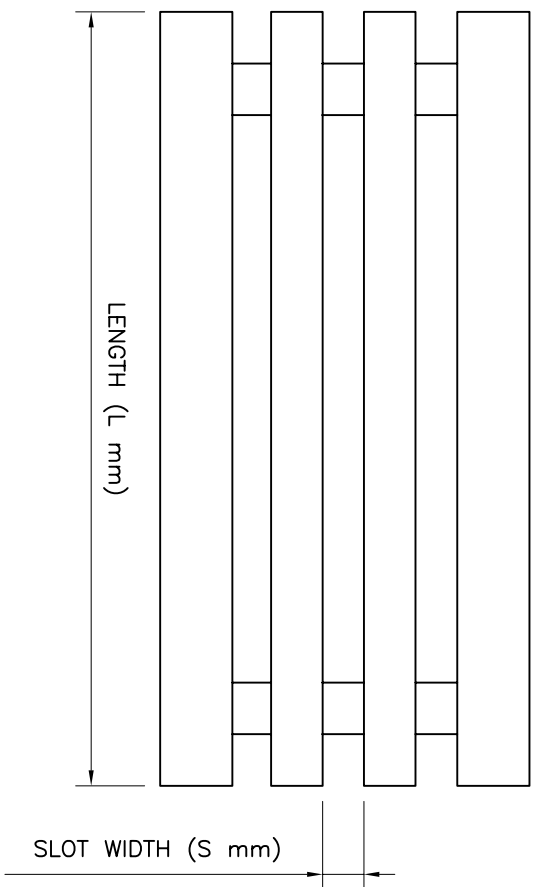

DESCRIPTION

- 1) EXTRUDED ALUMINIUM CONSTRUCTION.
- 2) POWDER COATED FINISH WHITE, AS STANDARD.
- 3) DIVERTER POWDER COATED FINISH BLACK, AS STANDARD.
- 4) STANDARD COATING THICKNESS – 60 MICRONS.

1) THIS DRAWING IS A COPYRIGHT OF THE BALAJI AIRVENT, IT IS NOT TO BE PRODUCED, COPIED, HANDED OVER TO THIRD PARTY OR USED FOR ANY OTHER PURPOSE OTHER THAN FOR WHITCH IT IS INTENDED.  
2) THIS DRAWING IS TO BE READ & NOT SCALED.

TOLERANCES ON ALL DIMENSION =  $\pm 3\text{mm}$   
ALL DIMENSIONS ARE IN MM  
ALL TOLERANCES AS IS/INDUSTRY SPECIFICATIONS

**BALAJI AIRVENT PRODUCTS**  
24, AMRUT INDUSTRIAL ESTATE NO.1 K.T. INDUSTRIAL PARK,  
GAURAIKADA, SECTOR-2, VALIV, VASAI (EAST) DIST. THANE-401 208

**LINEAR SLOT DIFFUSER**  
**MODEL AVLSD**

|      |            |       |       |            |               |
|------|------------|-------|-------|------------|---------------|
| DRN. | -          | DSGN. | -     | DRG. NO. : |               |
| DATE | 28/04/2012 | SCALE | N.T.S | SHT 1 OF 1 | REV. NO. : 00 |

| No. of Slot | SLOT WIDTH (S mm) |     |      |     |      |     |
|-------------|-------------------|-----|------|-----|------|-----|
|             | 16mm              |     | 20mm |     | 25mm |     |
|             | C                 | O   | C    | O   | C    | O   |
| 1           | 48                | 73  | 52   | 77  | 57   | 82  |
| 2           | 83                | 108 | 91   | 116 | 101  | 126 |
| 3           | 118               | 143 | 130  | 155 | 145  | 170 |
| 4           | 153               | 178 | 169  | 194 | 189  | 214 |
| 5           | 188               | 213 | 208  | 233 | 233  | 258 |
| 6           | 223               | 248 | 247  | 272 | 277  | 302 |
| 7           | 258               | 283 | 286  | 311 | 321  | 346 |
| 8           | 293               | 318 | 325  | 350 | 365  | 390 |