
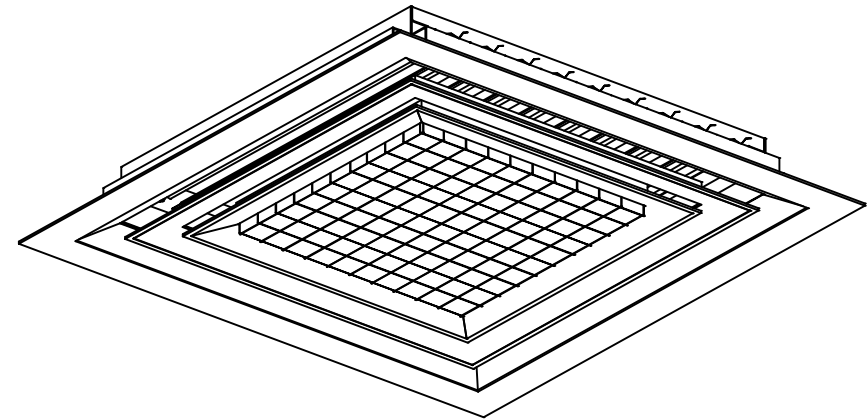


DO NOT SCALE THE DRAWING. IF IN DOUBT, PLEASE ASK

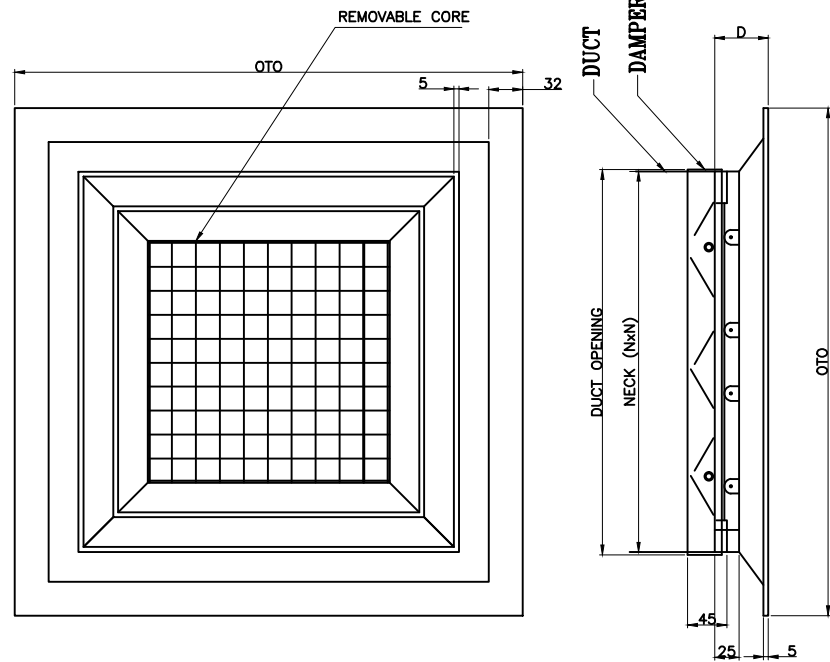

- 1) ALUMINIUM CONSTRUCTION-REMOVABLE CORE.
- 2) POWDER COATED FINISH- BROKEN WHITE AS STANDARD.
- 3) STANDARD COATING THICKNESS-60 MICRONS.
- 4) OPPOSED BLADE DAMPER COATED BLACK MATT AND IS NYLON GEAR OPERATED/ SCREW DRIVER OPERATED.

ALUMINIUM SUPPLY AIR FLAT DIFFUSERS (ARMSTRONG) WITH DAMPER							
MODEL	Suitable for Duct Opening		Neck Size (N x N) (mm)	Collar Size (C x C) (mm)	OUT TO OUT (OTO) (mm)	DEPTH (D) (mm)	HEIGHT (H) (mm)
	mm	Inches					
AVF06-D	150x150	6x6	144x144	225x225	595x595	45	98
AVF09-D	225x225	9x9	220x220	300x300	595x595	45	98
AVF12-D	300x300	12x12	294x294	375x375	595x595	45	98
AVF15-D	375x375	15x15	369x369	450x450	595x595	45	98
AVF18-D	450x450	18x18	444x444	525x525	595x595	45	98

TOLERANCES ON ALL DIMENSION = +3mm
ALL TOLERANCES AS IS/INDUSTRY SPECIFICATONS

BALAJI AIRVENT SYSTEMS PVT.LTD.

3,Priya Industrial Estate No.3, K.T.Industrial Park 2,
Near Gaurai pada,Waliv,Vasai (East),Dist.Palghar-401 208

TITLE AL. SQUARE DIFFUSER - 4 WAY AND STRAIGHT THROW
WITH DAMPER

DRN.	HITENDRA	DSGN.	RY	DRG. NO. : AVSD-D-A-4-0	
DATE	28/12/2015	SCALE	N.T.S	SHT 1 OF 1	REV. NO. : 00